


Spiral Blade Plug Baffles

- Enhance cooling balance.
- Improve maximum coolant action.
- Turbulent, effective movement of coolant reduces straight layered flow patterns.
- Maximum flow rates.
- Blade stays centered in cooling channel.
- Manufactured from high quality brass.

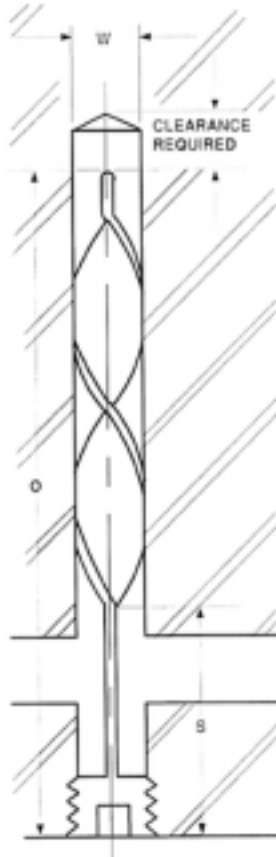

Part Number	Plug Size NPT	(O) Overall Length	(S) Straight Length	(W) Drill Diameter	Blade Thick	Price
BTB062X4	1/16	4	2	1/4	.050	3.85
BTB062X8	1/16	8	4	1/4	.050	4.35
BTB062X12	1/16	12	6	1/4	.050	4.80
BTB125X4	1/8	4	2	5/16	.050	4.50
BTB125X8	1/8	8	4	5/16	.050	4.80
BTB125X12	1/8	12	6	5/16	.050	5.25
BTB250X5	1/4	5	2	7/16	.080	5.50
BTB250X10	1/4	10	4	7/16	.080	6.00
BTB250X15	1/4	15	6	7/16	.080	7.10
BTB375X6	3/8	6	2	9/16	.090	6.35
BTB375X12	3/8	12	4	9/16	.090	7.20
BTB375X18	3/8	18	6	9/16	.090	8.95
BTB500X8	1/2	8	3	11/16	.090	7.85
BTB500X16	1/2	16	5	11/16	.090	8.90
BTB750X12	3/4	12	4	15/16	.090	12.50
BTB750X20	3/4	20	6	15/16	.090	15.10
BTB1000X16	1	16	5	1-1/8	.105	23.75
BTB1000X24	1	24	8	1-1/8	.105	29.50

Brass Diverting Plugs & Rod

BMS Brass Diverting Plugs and Rod are used to redirect waterflow through waterlines drilled in a mold.



Brass Diverting Plugs			
Part Number	Diameter ±.002	Length	Price
OP50	5/16	.62	.80
OP70	7/16	.62	.80
OP90	9/16	.75	.90
OP110	11/16	.87	1.05
OP150	15/16	1.25	1.30
Brass Rod			
BR18	1/8" Dia. x 18" Long		1.24

