


Through Hardened to 50-55 Rc. Tightest Tolerance in the Industry (.0003")

Tolerance Table			
(D) Pin Diameter	(H) Head Dia.	(T) Head Thick	(L) Length
-.0005"	+.000"	+.000"	+.375"
-.0008"	-.010"	-.002"	-.000"

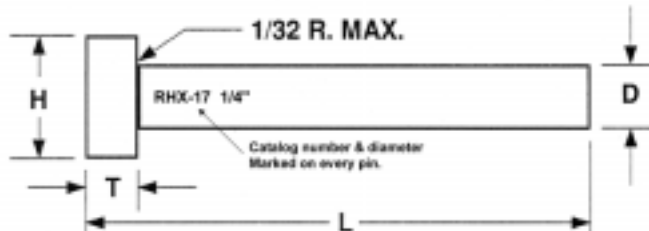

- Material: H-13 Hotwork Die Steel.
- Core: Through Hardened to 50-55 Rc.
- Surface: Ion Nitrided to 65-74 Rc.

(D*) Pin Dia.	(H) Head Dia.	(T) Head Thick	(L) Length			
			10"	Price	14"	Price
3/64	1/4	1/8	---	---	---	---
1/16	1/4	1/8	RHXO-5X10	5.85	---	---
5/64	1/4	1/8	RHXO-6X10	5.85	---	---
3/32	1/4	1/8	RHXO-7X10	5.35	---	---
7/64	1/4	1/8	RHXO-8X10	5.35	---	---
1/8	1/4	1/8	RHXO-9X10	2.60	RHXO-9X14	3.10
9/64	1/4	1/8	RHXO-10X10	3.50	RHXO-10X14	---
5/32	9/32	5/32	RHXO-11X10	2.70	RHXO-11X14	3.40
11/64	11/32	3/16	RHXO-12X10	3.75	RHXO-12X14	---
3/16	3/8	3/16	RHXO-13X10	2.85	RHXO-13X14	3.70
7/32	13/32	3/16	RHXO-15X10	3.25	RHXO-15X14	---
1/4	7/16	3/16	RHXO-17X10	3.45	RHXO-17X14	4.40
9/32	7/16	1/4	RHXO-19X10	3.95	RHXO-19X14	---
5/16	1/2	1/4	RHXO-21X10	4.30	RHXO-21X14	5.80
11/32	9/16	1/4	RHXO-23X10	5.00	RHXO-23X14	---
3/8	5/8	1/4	RHXO-25X10	5.55	RHXO-25X14	7.00
13/32	11/16	1/4	RHXO-27X10	6.25	RHXO-27X14	---
7/16	11/16	1/4	RHXO-29X10	6.70	RHXO-29X14	9.20
15/32	3/4	1/4	RHXO-31X10	7.10	RHXO-31X14	---
1/2	3/4	1/4	RHXO-33X10	7.60	RHXO-33X14	9.95

\* (D) = +.005 Over Standard