


Hard-Core™ Shoulder Ejector Pins

Through Hardened to 50-55 Rc. Tightest Tolerance in the Industry (.0003")

Tolerance Table			
(D) Pin Diameter	(H) Head Dia.	(T) Head Thick	(L) Length
-.0005"	+.000"	+.000"	+.375"
-.0008"	-.010"	-.002"	-.000"

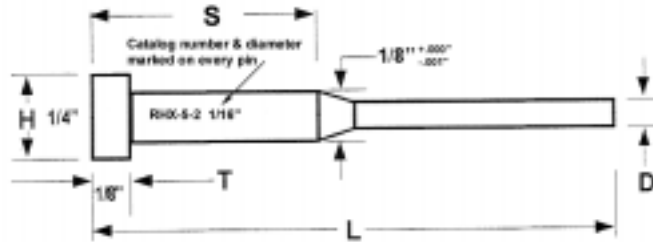

- Material: H-13 Hotwork Die Steel.
- Core: Through Hardened to 50-55 Rc.
- Surface: Ion Nitrided to 65-74 Rc.

(D) Pin Diameter	(S) Shoulder Length	(L) Length					
		6"	Price	10"	Price	14"	Price
1/32	1/2	RHX-2-1/2X6	8.05	---	---	---	---
	2	RHX-2-2X6	7.95	---	---	---	---
	3	---	---	RHX-2-3X10	10.10	---	---
	4	---	---	RHX-2-4X10	10.10	---	---
3/64	1/2	RHX-3-1/2X6	4.70	---	---	---	---
	2	RHX-3-2X6	4.45	RHX-3-2X10	5.30	---	---
	3	---	---	RHX-3-3X10	5.65	---	---
	4	---	---	RHX-3-4X10	6.25	---	---
1/16	1/2	RHX-5-1/2X6	4.35	RHX-5-1/2X10	5.40	---	---
	2	RHX-5-2X6	4.25	RHX-5-2X10	4.95	RHX-5-2X14	6.80
	3	---	---	RHX-5-3X10	5.25	---	---
	4	---	---	RHX-5-4X10	5.85	---	---
5/64	1/2	RHX-6-1/2X6	4.35	RHX-6-1/2X10	5.40	---	---
	2	RHX-6-2X6	4.25	RHX-6-2X10	4.95	RHX-6-2X14	6.80
	3	---	---	RHX-6-3X10	5.25	---	---
	4	---	---	RHX-6-4X10	5.85	---	---
3/32	1/2	RHX-7-1/2X6	4.00	RHX-7-1/2X10	5.00	---	---
	2	RHX-7-2X6	3.80	RHX-7-2X10	4.75	RHX-7-2X14	6.35
	3	---	---	RHX-7-3X10	4.75	---	---
	4	---	---	RHX-7-4X10	5.20	---	---
7/64	1/2	RHX-8-1/2X6	4.00	RHX-8-1/2X10	5.00	---	---
	2	RHX-8-2X6	3.80	RHX-8-2X10	4.45	RHX-8-2X14	6.35
	3	---	---	RHX-8-3X10	4.75	---	---
	4	---	---	RHX-8-4X10	5.20	---	---

Note: Oversized (+.005") Hard-Core™ Shoulder Ejector Pins are available in 10" and 14" lengths. Call for price and availability.