


Return Pins


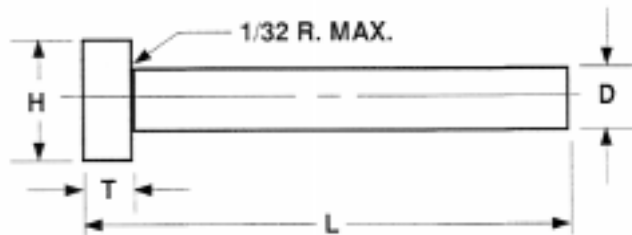


Tolerance Table			
(D) Pin Diameter	(H) Head Diameter	(T) Head Thickness	(L) Length
+0.000" -0.001"	+0.000" -0.010"	+0.000" -0.002"	+0.013" +0.008"

- Pins constructed from premium Nitralloy steel.
- Nitrided outside surface for a hardness of 65-80 Rc.
- Head hot forged and annealed for maximum strength.
- Ground smooth, friction free surface.

D=1/2" H=3/4" T=1/4"			D=5/8" H=7/8" T=1/4"			D=3/4" H=1" T=1/4"		
Length	Part #	Price	Length	Part #	Price	Length	Part #	Price
3-9/16	RP5356	4.75	4-1/16	RP6406	6.65	4-15/16	RP7493	9.50
4-1/16	RP5406	4.75	4-9/16	RP6456	7.15	5-7/16	RP7543	10.45
4-9/16	RP5456	5.25	5-1/16	RP6506	7.60	5-15/16	RP7593	10.45
5-1/16	RP5506	5.70	5-9/16	RP6556	7.60	6-7/16	RP7643	10.95
5-9/16	RP5556	5.70	6-1/16	RP6606	8.10	6-15/16	RP7693	11.40
6-1/16	RP5606	5.70	6-9/16	RP6656	8.55	7-7/16	RP7743	11.90
6-9/16	RP5656	6.20	7-1/16	RP6706	9.05	7-15/16	RP7793	12.35
---	---	---	7-9/16	RP6756	9.50	8-7/16	RP7843	12.85
---	---	---	8-1/16	RP6806	9.50	8-15/16	RP7893	13.30
---	---	---	---	---	---	9-7/16	RP7943	13.80

High Speed Steel Punches

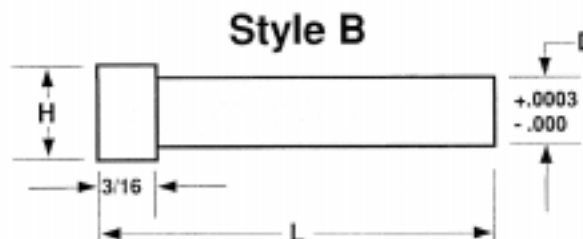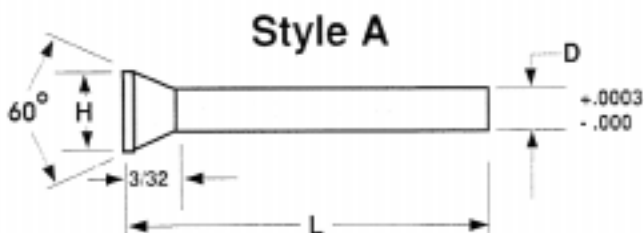

- Heat treated and tempered to a hardness of 60-62 Rc.
- Precision ground to close tolerances.

- Standard lengths - 1-1/2", 2", 2-1/2".
- Please specify length when ordering.
- Manufactured from M-2 high speed steel.

(D) Diameter Increments of .001"	(H) Head Diameter	Price
.031-.099	(D) + .050	Call
.100-1.00	(D) + .0625	Call

(D) Diameter Increments of .001"	(H) Head Diameter	Price
.031-.099	(D) + .050	Call
.100-1.00	(D) + .0625	Call