


# Shoulder Bushings Solid Bronze

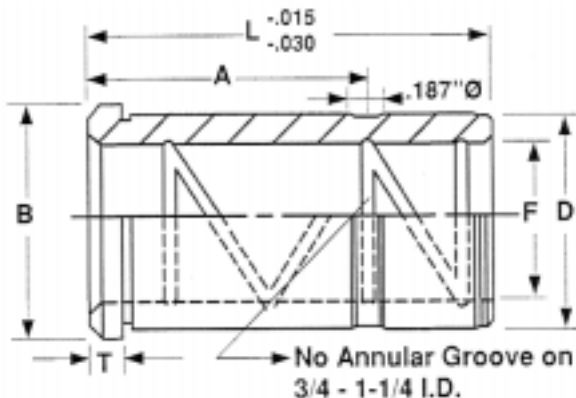

- Solid aluminum bronze.
- Internal grease grooves, auto lube design.

Tolerance Table				
Nominal I.D.	(F) Inner Diameter	(D) Outer Diameter	(B) Head Diameter	(T) Head Thick
	+0.0005 -0.0000	+0.0005 -0.0000	+0.000 -0.010	+0.000 -0.005
3/4	.7505	1.1255	1.302	3/16
7/8	.8755	1.2505	1.427	3/16
1	1.0005	1.3755	1.552	3/16
1-1/4	1.2505	1.6255	1.802	3/16
1-1/2	1.5005	2.0005	2.177	3/16
2	2.0005	2.5005	2.677	3/16

(L) Length	(A)	(F) 3/4"	Price	(F) 7/8"	Price	(F) 1"	Price
7/8	*	2700SB	14.25	2710SB	14.25	2730SB	14.75
1-3/8	.56	2701SB	15.70	2711SB	15.70	2731SB	16.15
1-7/8	.56	2702SB	16.15	2712SB	18.05	2732SB	17.10
2-3/8	1.56	2703SB	18.55	2713SB	19.95	2733SB	20.45
2-7/8	1.56	2704SB	23.75	2714SB	24.25	2734SB	22.80
3-3/8	1.56	2705SB	27.55	2715SB	26.60	2735SB	23.75
3-7/8	1.56	2706SB	33.25	2716SB	34.20	2736SB	33.25
4-3/8	1.56	2707SB	37.05	---	---	2737SB	34.70
4-7/8	1.56	---	---	---	---	2738SB	38.95
5-7/8	1.56	---	---	---	---	2740SB	52.25

\* No grease grooves or hole on 7/8" OAL bushing.

(L) Length	(A)	(F) 1-1/4"	Price	(F) 1-1/2"	Price	(F) 2"	Price
7/8	*	2750SB	16.15	2770SB	17.60	---	---
1-3/8	.56	2751SB	17.10	2771SB	19.95	2901SB	27.55
1-7/8	.56	2752SB	19.00	2772SB	21.85	2902SB	27.55
2-3/8	1.56	2753SB	21.40	2773SB	23.75	2903SB	31.35
2-7/8	1.56	2754SB	23.75	2774SB	29.00	2904SB	36.10
3-3/8	1.56	2755SB	25.65	2775SB	35.15	2905SB	38.00
3-7/8	1.56	2756SB	28.50	2776SB	38.95	2906SB	48.45
4-3/8	1.56	2757SB	31.35	2777SB	39.90	2907SB	55.10
4-7/8	1.56	2758SB	34.70	2778SB	44.65	2908SB	58.90
5-7/8	1.56	2760SB	35.65	2780SB	56.05	2910SB	74.10