


# Socket Head Cap Screws

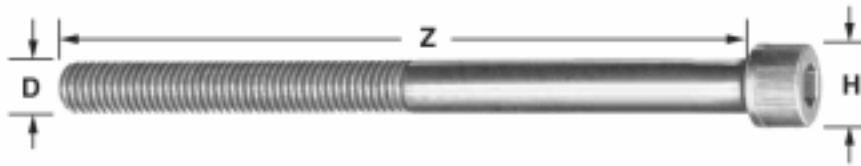


High grade alloy steel, heat treated to 38-45 Rc.  
Tensile strength: 180,000 psi minimum.

When ordering follow Part Number with SHCS (ex. 6x1/4SHCS)

Diameter (D)	#6		#8		#10		1/4		5/16	
Head Dia. (H)	.226		.270		5/16		3/8		15/32	
Threads Inch	32		32		24		20		18	
Length (Z)	Part #	Price	Part #	Price	Part #	Price	Part #	Price	Part #	Price
1/4	6X1/4	.10	8X1/4	.10	10-24X1/4	.18	---	---	---	---
3/8	6X3/8	.10	8X3/8	.10	10-24X3/8	.12	1/4X3/8	.14	5/16X3/8	.29
1/2	6X1/2	.12	8X1/2	.13	10-24X1/2	.12	1/4X1/2	.14	5/16X1/2	.29
5/8	6X5/8	.12	8X5/8	.13	10-24X5/8	.12	1/4X5/8	.14	5/16X5/8	.29
3/4	6X3/4	.12	8X3/4	.13	10-24X3/4	.12	1/4X3/4	.14	5/16X3/4	.29
7/8	6X7/8	.12	8X7/8	.10	10-24X7/8	.14	1/4X7/8	.14	5/16X7/8	.23
1	---	---	8X1	.14	10-24X1	.14	1/4X1	.14	5/16X1	.23
1-1/4	---	---	8X1-1/4	.18	10-24X1-1/4	.14	1/4X1-1/4	.18	5/16X1-1/4	.23
1-1/2	---	---	8X1-1/2	.18	10-24X1-1/2	.23	1/4X1-1/2	.23	5/16X1-1/2	.23
1-3/4	---	---	---	---	10-24X1-3/4	.23	1/4X1-3/4	.23	5/16X1-3/4	.32
2	---	---	---	---	10-24X2	.24	1/4X2	.23	5/16X2	.32
2-1/4	---	---	---	---	---	---	1/4X2-1/4	.29	5/16X2-1/4	.38
2-1/2	---	---	---	---	---	---	1/4X2-1/2	.42	5/16X2-1/2	.42
2-3/4	---	---	---	---	---	---	1/4X2-3/4	.42	5/16X2-3/4	.42
3	---	---	---	---	---	---	1/4X3	.44	5/16X3	.54
3-1/4	---	---	---	---	---	---	---	---	5/16X3-1/4	.66
3-1/2	---	---	---	---	---	---	---	---	5/16X3-1/2	.74

# Socket Head Cap Screws

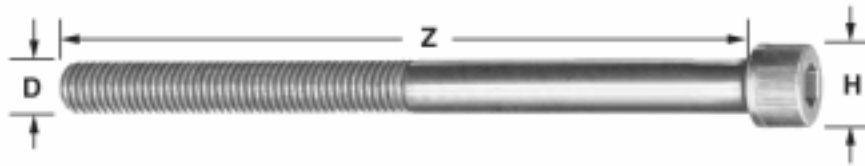

High grade alloy steel, heat treated to 38-45 Rc.  
Tensile strength: 180,000 psi minimum.

When ordering follow Part Number with SHCS (ex. 6x1/4SHCS)

Diameter (D)	3/8		1/2		5/8		3/4		1	
Head Dia. (H)	9/16		3/4		15/16		1-1/8		1-1/2	
Threads Inch	16		13		11		10		8	
Length (Z)	Part #	Price	Part #	Price	Part #	Price	Part #	Price	Part #	Price
1/2	3/8X1/2	.38	1/2X1/2	.92	---	---	---	---	---	---
5/8	3/8X5/8	.34	1/2X5/8	.72	---	---	---	---	---	---
3/4	3/8X3/4	.29	1/2X3/4	.64	---	---	---	---	---	---
7/8	3/8X7/8	.32	1/2X7/8	.59	---	---	---	---	---	---
1	3/8X1	.34	1/2X1	.62	5/8X1	1.22	---	---	---	---
1-1/4	3/8X1-1/4	.34	1/2X1-1/4	.68	5/8X1-1/4	1.28	---	---	---	---
1-1/2	3/8X1-1/2	.38	1/2X1-1/2	.76	5/8X1-1/2	1.32	---	---	---	---
1-3/4	3/8X1-3/4	.44	1/2X1-3/4	.82	5/8X1-3/4	1.44	---	---	---	---
2	3/8X2	.48	1/2X2	.88	5/8X2	1.56	3/4X2	2.41	1X2	6.05
2-1/4	3/8X2-1/4	.52	1/2X2-1/4	1.02	5/8X2-1/4	1.68	3/4X2-1/4	2.48	---	---
2-1/2	3/8X2-1/2	.64	1/2X2-1/2	1.06	5/8X2-1/2	1.62	3/4X2-1/2	2.72	1X2-1/2	6.15
2-3/4	3/8X2-3/4	.68	1/2X2-3/4	1.16	5/8X2-3/4	2.02	3/4X2-3/4	3.00	---	---
3	3/8X3	.74	1/2X3	1.26	5/8X3	2.20	3/4X3	2.20	1X3	7.55
3-1/4	3/8X3-1/4	.88	1/2X3-1/4	1.34	5/8X3-1/4	2.31	3/4X3-1/4	3.52	---	---
3-1/2	3/8X3-1/2	.98	1/2X3-1/2	1.52	5/8X3-1/2	2.42	3/4X3-1/2	3.74	1X3-1/2	8.35
4	3/8X4	1.12	1/2X4	1.74	5/8X4	2.74	3/4X4	3.94	1X4	9.35
4-1/2	3/8X4-1/2	1.32	1/2X4-1/2	2.12	5/8X4-1/2	3.21	3/4X4-1/2	4.62	---	---
5	3/8X5	1.56	1/2X5	2.32	5/8X5	3.54	3/4X5	5.20	1X5	11.05
5-1/4	---	---	1/2X5-1/4	2.32	---	---	---	---	---	---
5-1/2	---	---	1/2X5-1/2	2.56	5/8X5-1/2	2.62	3/4X5-1/2	5.55	1X5-1/2	11.85
5-3/4	---	---	1/2X5-3/4	3.75	---	---	---	---	---	---
6	3/8X6	2.41	1/2X6	2.90	5/8X6	3.80	3/4X6	6.04	1X6	15.35
6-1/2	---	---	1/2X6-1/2	4.55	5/8X6-1/2	4.40	3/4X6-1/2	8.60	1X6-1/2	16.20
7	---	---	1/2X7	4.95	5/8X7	6.55	3/4X7	9.54	1X7	18.45
7-1/2	---	---	1/2X7-1/2	5.05	5/8X7-1/2	11.28	---	---	---	---
8	---	---	1/2X8	5.85	5/8X8	8.05	3/4X8	11.88	1X8	22.75
9	---	---	1/2X9	8.25	---	---	---	---	---	---
10	---	---	1/2X10	9.25	5/8X10	15.35	3/4X10	16.05	---	---
12	---	---	1/2X12	14.20	5/8X12	6.75	3/4X12	16.96	---	---