

# Wearstrips - Drilled

## Self-Lubricating & Plain Bronze


**Materials:**

- Aluminum Bronze material with oil impregnated graphite plugs. The plugs cover 25-30% of the wear surface and are arranged to generate optimal coverage at any engagement direction of the wear plate.

**Tolerances:**

- Thickness  $\pm .001''$
- Mount hole locations  $\pm .010''$
- Unless noted  $\pm .010''$

### Mounting Hole Pattern Details

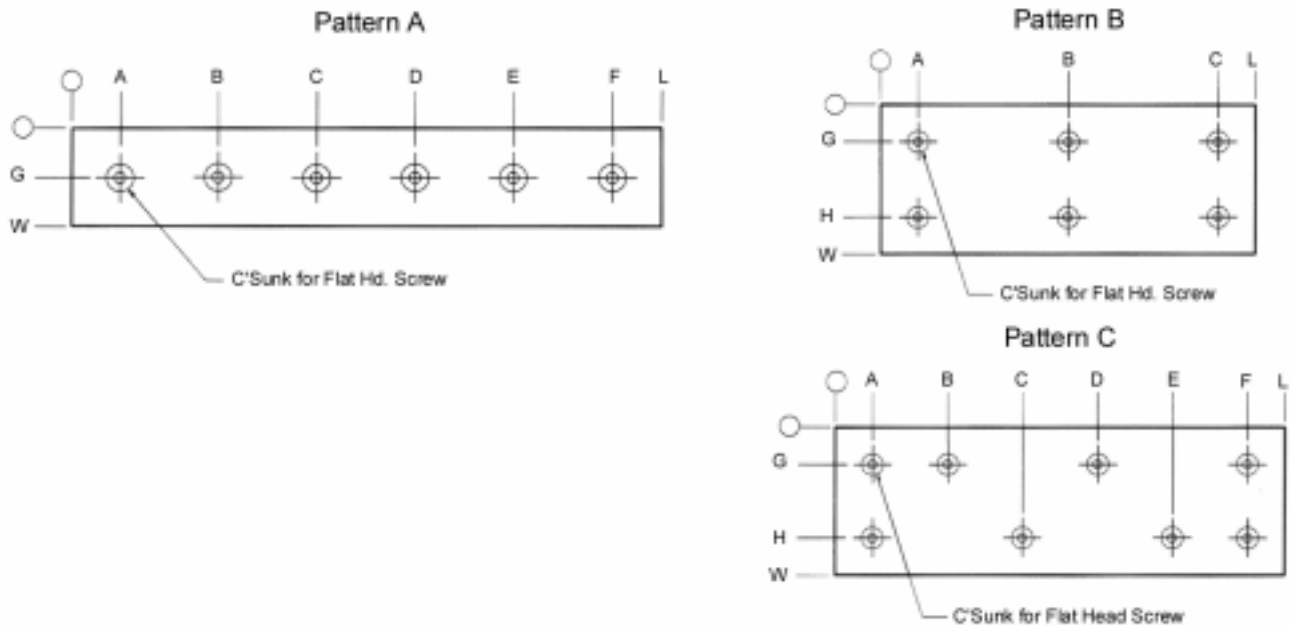

**Mounting Hole Location Specifications on Next Page**

**Recommended Mounting Screws:**

- 1/4" thick plates: 1/4" flat head screw
- 3/8" thick plates: 1/4" SHCS
- 1/2" thick plates: 5/16" SHCS
- 5/8" thick plates: 5/16" SHCS

# Wearstrips - Drilled

## Self-Lubricating & Plain Bronze

Width W	Length L	Mounting Hole Pattern and Location									
		Hole Qty.	Hole Pattern	A	B	C	D	E	F	G	H
1.00	4.00	2	A	1.00	3.00	---	---	---	---	.50	---
	5.00	3		.50	2.50	4.50	---	---	---	.50	---
	6.00	3		1.00	3.00	5.00	---	---	---	.50	---
	8.00	4		1.00	3.00	5.00	7.00	---	---	.50	---
	10.00	5		1.00	3.00	5.00	7.00	9.00	---	.50	---
	12.00	6		1.00	3.00	5.00	7.00	9.00	11.00	.50	---
1.50	3.00	2	A	.50	2.50	---	---	---	---	.75	---
	4.00	2		1.00	3.00	---	---	---	.75	---	
	5.00	3		.50	2.50	4.50	---	---	.75	---	
	6.00	3		1.00	3.00	5.00	---	---	.75	---	
	8.00	4		1.00	3.00	5.00	7.00	---	.75	---	
	10.00	5		1.00	3.00	5.00	7.00	9.00	.75	---	
	12.00	6		1.00	3.00	5.00	7.00	9.00	11.00	.75	---
2.00	3.00	2	A	.50	2.50	---	---	---	---	1.00	---
	4.00	2		1.00	3.00	---	---	---	1.00	---	
	5.00	3		.50	2.50	4.50	---	---	1.00	---	
	6.00	3		1.00	3.00	5.00	---	---	1.00	---	
	8.00	4		1.00	3.00	5.00	7.00	---	1.00	---	
	10.00	5		1.00	3.00	5.00	7.00	9.00	1.00	---	
	12.00	6		1.00	3.00	5.00	7.00	9.00	11.00	1.00	---
	2.50	3.00		2	A	.50	2.50	---	---	---	---
4.00		2	1.00	3.00		---	---	---	1.25	---	
5.00		3	.50	2.50		4.50	---	---	1.25	---	
6.00		3	1.00	3.00		5.00	---	---	1.25	---	
8.00		4	1.00	3.00		5.00	7.00	---	1.25	---	
10.00		5	1.00	3.00		5.00	7.00	9.00	1.25	---	
12.00		6	1.00	3.00		5.00	7.00	9.00	11.00	1.25	---
3.00		3.00	4	B		.50	2.50	---	---	---	---
	4.00	4	B	1.00	3.00	---	---	---	---	.50	2.50
	5.00	4	B	.50	4.50	---	---	---	---	.50	2.50
	6.00	4	B	1.00	5.00	---	---	---	---	.50	2.50
	8.00	6	C	1.00	3.00	5.00	---	---	7.00	.50	2.50
	10.00	6	B	1.00	5.00	9.00	---	---	---	.50	2.50
	12.00	8	C	1.00	3.00	5.00	7.00	9.00	11.00	.50	2.50
4.00	4.00	4	B	1.00	3.00	---	---	---	---	1.00	3.00
	5.00	4	B	.50	4.50	---	---	---	---	1.00	3.00
	6.00	4	B	1.00	5.00	---	---	---	---	1.00	3.00
	8.00	6	C	1.00	3.00	5.00	---	---	7.00	1.00	3.00
	10.00	6	B	1.00	5.00	9.00	---	---	---	1.00	3.00
	12.00	8	C	1.00	3.00	5.00	7.00	9.00	11.00	1.00	3.00

# Wearstrips - Drilled

## Self-Lubricating & Plain Bronze

Wear Strip Thick.	Width W	Length L	With Graphite Plugs Part #	Price	Without Graphite Plugs Part #	Price	Wear Strip Thick.	Width W	Length L	With Graphite Plugs Part #	Price	Without Graphite Plugs Part #	Price
1/4"	1.00	4.00	28-32G	29.45	28-32	23.55	3/8"	1.00	4.00	38-32G	32.65	38-32	25.15
		5.00	28-40G	30.80	28-40	25.10			5.00	38-40G	34.65	38-40	27.20
		6.00	28-48G	32.45	28-48	26.30			6.00	38-48G	38.30	38-48	28.75
		8.00	28-64G	35.15	28-64	29.05			8.00	38-64G	41.50	38-64	32.20
		10.00	28-80G	38.00	28-80	31.75			10.00	38-80G	45.65	38-80	35.70
		12.00	28-96G	42.05	28-96	34.45			12.00	38-96G	54.10	38-96	39.25
	1.50	4.00	212-32G	31.80	212-32	25.75		1.50	4.00	312-32G	37.15	312-32	28.15
		5.00	212-40G	34.00	212-40	27.75			5.00	312-40G	40.45	312-40	30.80
		6.00	212-48G	36.00	212-48	29.40			6.00	312-48G	44.15	312-48	32.95
		8.00	212-64G	40.10	212-64	33.10			8.00	312-64G	50.80	312-64	37.80
		10.00	212-80G	44.30	212-80	36.75			10.00	312-80G	57.80	312-80	42.60
		12.00	212-96G	48.65	212-96	40.40			12.00	312-96G	65.10	312-96	47.40
	2.00	4.00	216-32G	34.85	216-32	28.10		2.00	4.00	316-32G	42.30	316-32	31.10
		5.00	216-40G	37.90	216-40	30.60			5.00	316-40G	47.15	316-40	34.45
		6.00	216-48G	40.25	216-48	32.75			6.00	316-48G	50.95	316-48	37.25
		8.00	216-64G	45.75	216-64	37.45			8.00	316-64G	60.15	316-64	43.40
		10.00	216-80G	51.10	216-80	42.10			10.00	316-80G	68.75	316-80	49.50
		12.00	216-96G	56.50	216-96	46.75			12.00	316-96G	77.70	316-96	55.65
	2.50	4.00	220-32G	37.10	220-32	30.25		2.50	4.00	320-32G	45.60	320-32	34.05
		5.00	220-40G	40.60	220-40	33.25			5.00	320-40G	51.20	320-40	38.00
		6.00	220-48G	43.30	220-48	35.90			6.00	320-48G	55.35	320-48	41.45
		8.00	220-64G	49.55	220-64	41.50			8.00	320-64G	65.35	320-64	48.85
		10.00	220-80G	53.65	220-80	47.15			10.00	320-80G	69.55	320-80	56.25
		12.00	220-96G	61.60	220-96	52.75			12.00	320-96G	83.75	320-96	63.60
	3.00	4.00	224-32G	40.80	224-32	33.40		3.00	4.00	324-32G	51.40	324-32	38.10
		5.00	224-40G	43.30	224-40	36.50			5.00	324-40G	53.30	324-40	42.25
		6.00	224-48G	46.85	224-48	39.65			6.00	324-48G	59.45	324-48	46.40
		8.00	224-64G	54.60	224-64	46.65			8.00	324-64G	70.85	324-64	55.60
		10.00	224-80G	63.05	224-80	52.90			10.00	324-80G	87.85	324-80	63.90
		12.00	224-96G	69.10	224-96	59.95			12.00	324-96G	94.00	324-96	73.15
	4.00	4.00	232-32G	44.90	232-32	38.05		4.00	4.00	332-32G	56.40	332-32	43.85
		5.00	232-40G	49.20	232-40	42.15			5.00	332-40G	63.45	332-40	49.25
		6.00	232-48G	53.75	232-48	46.30			6.00	332-48G	71.15	332-48	54.65
		8.00	232-64G	63.55	232-64	55.30			8.00	332-64G	86.55	332-64	66.40
		10.00	232-80G	72.65	232-80	63.60			10.00	332-80G	101.95	332-80	77.15
		12.00	232-96G	82.20	232-96	72.60			12.00	332-96G	116.75	332-96	88.95

# Wearstrips - Drilled

## Self-Lubricating & Plain Bronze

Wear Strip Thick.	Width W	Length L	With Graphite Plugs Part #	Price	Without Graphite Plugs Part #	Price	Wear Strip Thick.	Width W	Length L	With Graphite Plugs Part #	Price	Without Graphite Plugs Part #	Price					
1/2"	1.50	3.00	412-24G	35.30	412-24	24.25	5/8"	1.50	3.00	512-24G	37.55	512-24	26.00					
		4.00	412-32G	39.55	412-32	30.55			4.00	512-32G	42.10	512-32	33.05					
		5.00	412-40G	43.45	412-40	33.85			5.00	512-40G	46.60	512-40	37.00					
		6.00	412-48G	47.65	412-48	36.50			6.00	512-48G	51.35	512-48	40.20					
		8.00	412-64G	55.45	412-64	42.45			8.00	512-64G	60.40	512-64	47.35					
		10.00	412-80G	63.60	412-80	48.40			10.00	512-80G	69.70	512-80	54.50					
	2.00	12.00	412-96G	72.05	412-96	54.40		12.00	512-96G	79.35	512-96	61.65	2.00	3.00	516-24G	41.85	516-24	29.10
		3.00	416-24G	39.40	416-24	26.85		4.00	516-32G	48.60	516-32	37.45						
		4.00	416-32G	45.45	416-32	34.30		5.00	516-40G	55.70	516-40	42.35						
		5.00	416-40G	51.15	416-40	38.45		6.00	516-48G	60.90	516-48	46.55						
		6.00	416-48G	55.45	416-48	41.95		8.00	516-64G	72.45	516-64	55.65						
		8.00	416-64G	66.30	416-64	49.55		10.00	516-80G	84.05	516-80	64.80						
	2.50	10.00	416-80G	76.40	416-80	57.15		12.00	516-96G	95.95	516-96	73.90	2.50	3.00	520-24G	47.45	520-24	32.05
		12.00	416-96G	86.80	416-96	64.75		4.00	520-32G	53.20	520-32	41.65						
		3.00	420-24G	45.10	420-24	29.45		5.00	520-40G	60.70	520-40	47.50						
		4.00	420-32G	49.50	420-32	37.90		6.00	520-48G	66.05	520-48	52.65						
		5.00	420-40G	56.10	420-40	42.90		8.00	520-64G	80.15	520-64	63.70						
		6.00	420-48G	61.05	420-48	47.20		10.00	520-80G	88.05	520-80	74.70						
	3.00	8.00	420-64G	72.95	420-64	56.45		12.00	520-96G	105.85	520-96	85.70	3.00	3.00	524-24G	51.30	524-24	36.35
		10.00	420-80G	79.05	420-80	65.70		4.00	524-32G	61.70	524-32	47.45						
		12.00	420-96G	95.10	420-96	74.90		5.00	524-40G	65.15	524-40	53.60						
		3.00	424-24G	47.75	424-24	33.05		6.00	524-48G	73.20	524-48	59.70						
		4.00	424-32G	57.15	424-32	42.90		8.00	524-64G	89.55	524-64	73.40						
		5.00	424-40G	59.60	424-40	48.00		10.00	524-80G	110.10	524-80	85.65						
4.00	6.00	424-48G	66.75	424-48	53.20	12.00	524-96G	121.15	524-96	99.35	4.00	4.00	532-32G	68.75	532-32	56.25		
	8.00	424-64G	80.90	424-64	64.70	5.00	532-40G	78.60	532-40	64.40								
	10.00	424-80G	99.45	424-80	75.00	6.00	532-48G	89.00	532-48	72.45								
	12.00	424-96G	108.35	424-96	86.55	8.00	532-64G	110.25	532-64	90.10								
	4.00	432-32G	62.45	432-32	49.90	10.00	532-80G	131.15	532-80	106.30								
	5.00	432-40G	70.85	432-40	56.65	12.00	532-96G	151.75	532-96	123.95								

**Recommended Mounting Screws:**

- 1/4" thick plates: 1/4" flat head screw
- 3/8" thick plates: 1/4" SHCS
- 1/2" thick plates: 5/16" SHCS
- 5/8" thick plates: 5/16" SHCS