

# Heater Wire & Accessories


BMS offers two different types of wire for use in wiring heater bands and cartridge heaters. Both types rated at 600 Volts with fine stranding for maximum flexibility. TGGT wire is temperature rated at 482° F (250° C) and the 3 layer insulation is PTFE tape, fiberglass insulation, and PTFE-finish glass braid overlap. The MGT wire is rated at 842° F (450° C) and the 2 layer insulation is glass reinforced mica insulation and glass braid impregnated with flame and heat resistant finish.



Part Number	Wire Size	Amps	Price 10-99 ft.	Price 100-499 ft.	Price 500+
TGGT-10	10	72	3.15	2.55	1.93
TGGT-12	12	50	1.95	1.59	1.28
TGGT-14	14	35	1.44	1.20	.87
TGGT-16	16	25	1.22	1.02	.70
TGGT-18	18	22	.90	.75	.59
TGGT-20	20	20	.74	.62	.46
Part Number	Wire Size	Amps	Price 10-99 ft.	Price 100-499 ft.	Price 500+
MGT-10	10	75	1.85	1.50	1.17
MGT-12	12	56	1.50	1.25	.80
MGT-14	14	45	1.26	1.05	.67
MGT-16	16	30	1.00	.84	.61
MGT-18	18	22	.90	.75	.59
MGT-20	20	12	.80	.67	.47

## High Temperature Butt Connectors


High temperature butt connectors are used for high temperature applications up to 900°F.



Part #	Wire Size	Price
22/18B	22-18	.12
16/14B	16-14	.16
12/10B	12-10	.42

## High Temperature Ring Terminals

High temperature ring terminals are used for high temperature applications up to 900°F.

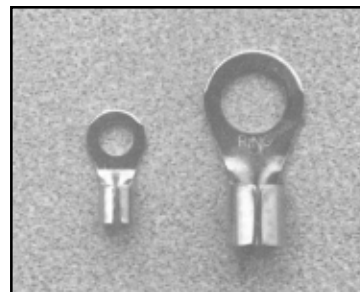

Part #	Wire Size	Stud Size	Price
22/18-10R	22-18	#10	.10
16/14-10R	16-14	#10	.20
16/14-8R	16-14	#8	.08
16/14-250R	16-14	1/4"	.10
12/10-10R	12-10	#10	.30
12/10-250R	12-10	1/4"	.16
8-250R	8	1/4"	.48
6-375R	6	3/8"	1.16